

IN LINE DIRECTIONAL CONTROL VALVES, CHECK VALVES

FT257/6

32 MPa (320 bar)

1 DESCRIPTION

Direct acting check valves, poppet type BSP thread ports for in-line assembly Body, poppet and spring in steel Maximum operating pressure: 320 bar Poppet release pressure: 0,35 bar (different settings available on request) Outer section for easier assembly with hexagonal spanner.



2 ORDERING CODE


(1)					(2)
FT	257	/	6	-	

(1) FT257/6: check valve

(2) dimensions

- 14: Ports (Ø A) 1/4" BSP, Qmax 16l/min B 12,5 - C 63 - CH 22
- 38: Ports (Ø A) 3/8" BSP, Qmax 30l/min B 12,5 - C 69 - CH 27
- 12: Ports (Ø A) 1/2" BSP, Qmax 60l/min B 12,5 - C 80,5 - CH 32

(subject to technical and dimensional changes without notice)

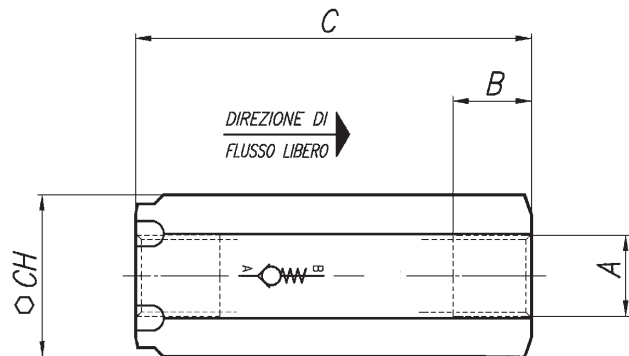

3 TYPICAL DIAGRAMS

