



LINE ASSEMBLY BODIES FOR 2-WAY SCREW-IN VALVES

LAB

35 MPa (350 bar)

1 DESCRIPTION

Suitable for standard 2-way screw-in valves
 In-line parallel assembly: all ports connected
 In-line series assembly: one port n 1 plugged
 Standard execution with plug on port n 1
 Material: aluminium
 Maximum operating pressure: 350 bar
 Cavity according to UNF standards, BSP ports



2 ORDERING CODE

(1)	(2)	(3)	(4)
LAB	-	2	/


(1) LAB: Line assembly body

(2) Nominal size
 34: Cavity 3/4" - 16 UNF
 78: Cavity 7/8" - 14 UNF

(3) 2: 2-way valves

(4) Port configuration
 14: ports 1/4" BSP (LAB-34 only)
 38: ports 3/8" BSP
 12: ports 1/2" BSP (LAB-78 only)

3 LAB-34-2/** Mass: 0,25 kg

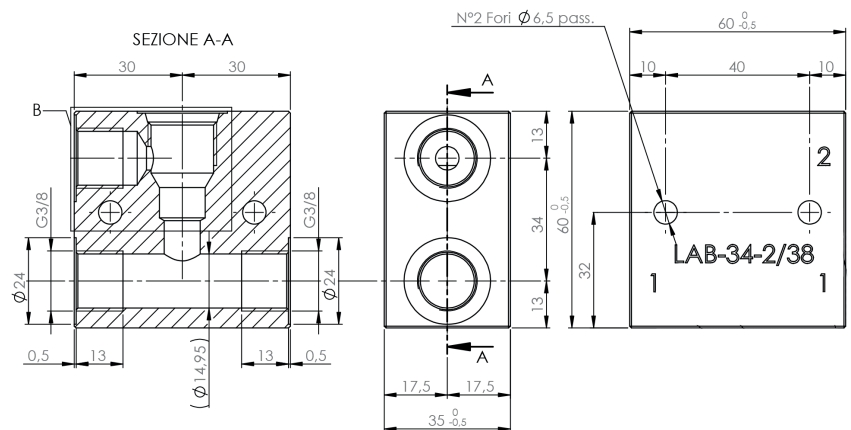

4 LAB-78-2/** Mass: 0,37 kg

